





PROPRIETARY INFORMATION  
COMPANY CONFIDENTIAL


REV.	ECN. NO.	DESCRIPTION	ENG	DATE
X1		INITIAL	HSIO	7/21/2016

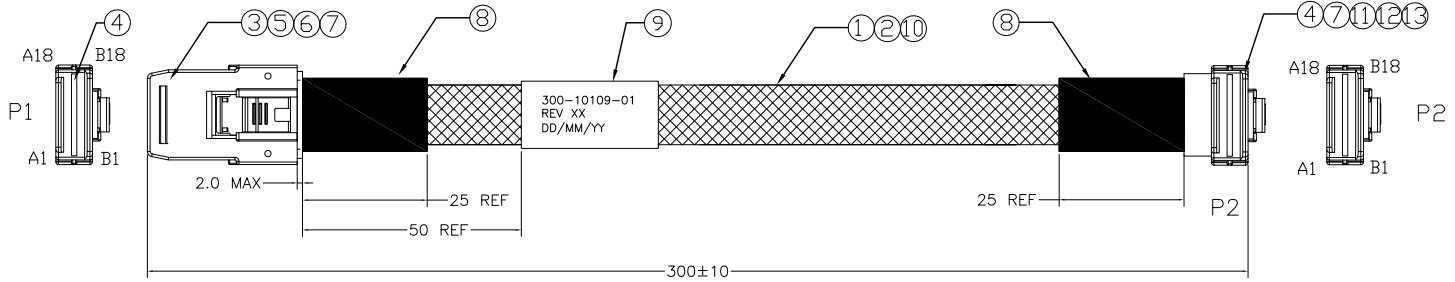

LABEL INFORMATION



WIRING TABLE

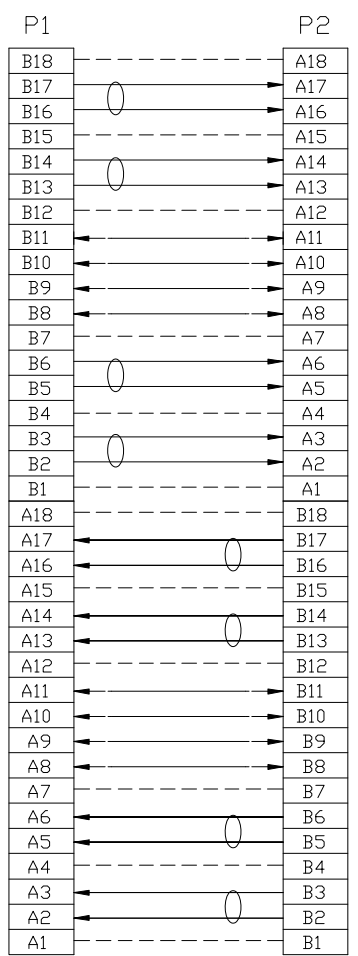


NOTES:

- TEST:
  - 100% TEST OPEN, SHORT, MISWIRE;
  - INSULATION IMPEDANCE: 10M Ohm/Min/300VDC
  - CONDUCTOR RESISTANCE: 3.0 Ohm/Max.
  - HI POT TEST: 300V AV/10ms.
- THE PRODUCT CONFORMS TO THE MECHANICAL DIMENSION AND ELECTRICAL PERFORMANCE REQUIREMENTS: SFF 8086 AND SFF 8087
- THE CABEL MEETS SAS 2.1 SPECIFICATIONS.

MATERIAL:

- HOUSING: PBT, BLK
- PCB: FR-4 15u"
- CABLE:
  - CONDUCTOR: TINNED COPPER
  - INSULATION: HDPE
- LATCH: S301
- RIVET: S304

S/N	DESCRIPTION	ITEM ND.	QTY.
14	DUST-PROOF FOR SFF-8087, HDPE	P-MSIPE-0006	2
13	METAL CLIP FOR SFF8087 R/A, S301	M-MSISLOT-05	1
12	PLASTIC SHELL FOR SFF8087 R/A, PBT, BLK	P-MSIPB-0004	1
11	INNER MOLDING FOR SFF8087 R/A, PE, BLK	P-MSIPE-0007	1
10	PLASTIC BRAID SLEEVE, Ø8.0, PET, BLACK	O-NB-S-0004	A/R
9	ID LABEL, L60*W25MM	10081646-002	1
8	ACETATE TAPE, 25mm, BLACK	O-AT-S-0004	A/R
7	LATCH FOR SFF-8087, SUS 301	OTEZ025A/SS=P	2
6	RIVETS FOR SFF-8087, S304, Ø1.2*6.8MM, KNURL	M-MSISLKN-03	2
5	PLASTIC SHELL FOR SFF-8087, 180°, PBT, BLACK	P-MSIPB-0001	1
4	PCB, FR-4, 4LAYER, AU15U"	P-MSI3015-05B	2
3	INNER MOLD FOR SFF-8087, PE, BLACK	P-MSIPE-0008	1
2	FLAT CABLE 30AWG, GRAY, 4P	CAB-FLA-Y-4P-30PC-02	A/R
1	SAS CABLE, 30AWG, DERAN FOIL COLOR SILVER	CAB-MSI-D-30MN	A/R

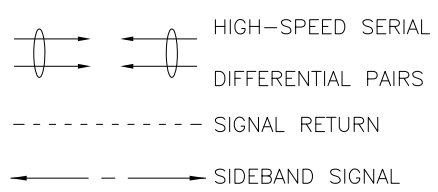

GENERAL TOLERANCE X.± 0.50 .X± 0.20 .XX± 0.10 .XXX± 0.05	ANGLE TOLERANCE X°± .X°± .XX°± .XXX°±	DRAWN HSIO	DATE 2016.07.21	
MATL SEE BOM	FINISH SEE NOTES	CHECKED	DATE	
SCALE N/A	UNIT mm	APPROVED	DATE	PART NUMBER 300-10109-01
SHEET 1 OF 1				DRAWING NO. 300-10109
				SIZE A4
				REV. X1